


# **W**Current detector control relay

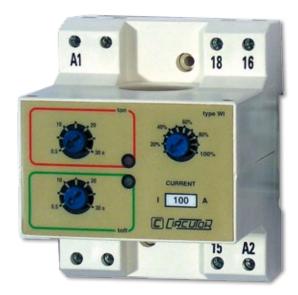

#### Description

The **WI** current detectors are electronic devices with an output relay that is connected or disconnected, in accordance with the level of current detected in the circuit.

- The trip level is adjusted with the potentiometer on the front of the unit.
- The reset process is automatic with currents under 10% of the trip level (Hysteresia)
- Delay: the connection and disconnection times of the output relay can be adjusted separately.
- Measurement of the current, depending on the type:
- $^{\circ}$  With built-in current transformer (net diameter  $\varnothing$  25 mm)
- Separate transformer, input.../5 Aac

#### Application

**WIs** can be used in any application that needs to control the load:

- Power supply units for grinders or aggregate grinding units.
- Loads in extrusion machines
- Pump control
- Load on motors, etc.

#### **Features**

Power supply circuit				
Voltage*	230 Vac (-15 +10 %)			
Frequency*	50 Hz			
Consumption	2 VA			
Testing voltages between the circuits and the grid				
Measurement circuit	2,500 V			
Relay contacts	1,500 V			
Output relay				
Insulation voltage (U <sub>i</sub> )	250 Vac			
Thermal current I <sub>th</sub>	5 A			
Interrupting power	(10 <sup>5</sup> operations) with resistive load $U_e/I_e$ : 240 Vac / 3.2 A with inductive load $U_e/I_e$ : 240 Vac / 0.8 A 30 Vdc / 1.6 A			
Build features				
Fixing	DIN rail			
Dimensions	4 modules			
Weight	250 g			
Degree of protection	IP 41			
Operating temperature	0 +50 ° C			
Standards				
IEC 605, IEC 1010-1, EN 61010-1, EN 50 081, EN 50 082, IEC 255, UL 94, UNE 20 607, UNE 21 136, VDE 0110				

(\*) Other voltages and frequencies on demand.






### W

**Current detector control relay** 

# Dimensions

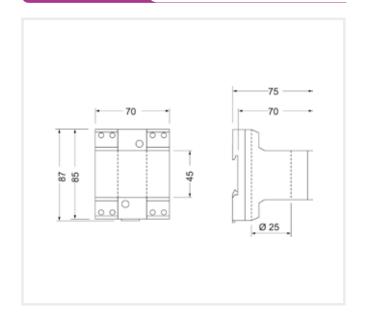



# References

Trigger time (adjustable)	Adjustment margin (adjustable)	Туре	Code
0.5 30 s	0.5 5 A	WI / 005-30	P32011
0.5 30 s	1 10 A	WI / 010-30	P32012
0.5 30 s	2 20 A	WI / 020-30	P32013
0.5 30 s	5 50 A	WI / 050-30	P32014
0.5 30 s	10 100 A	WI / 0100-30	P32015
0.5 30 s	s / transformer / 5 A	WI / TS	P32010

# Connections

